


# LED Strip

the perfect light solution


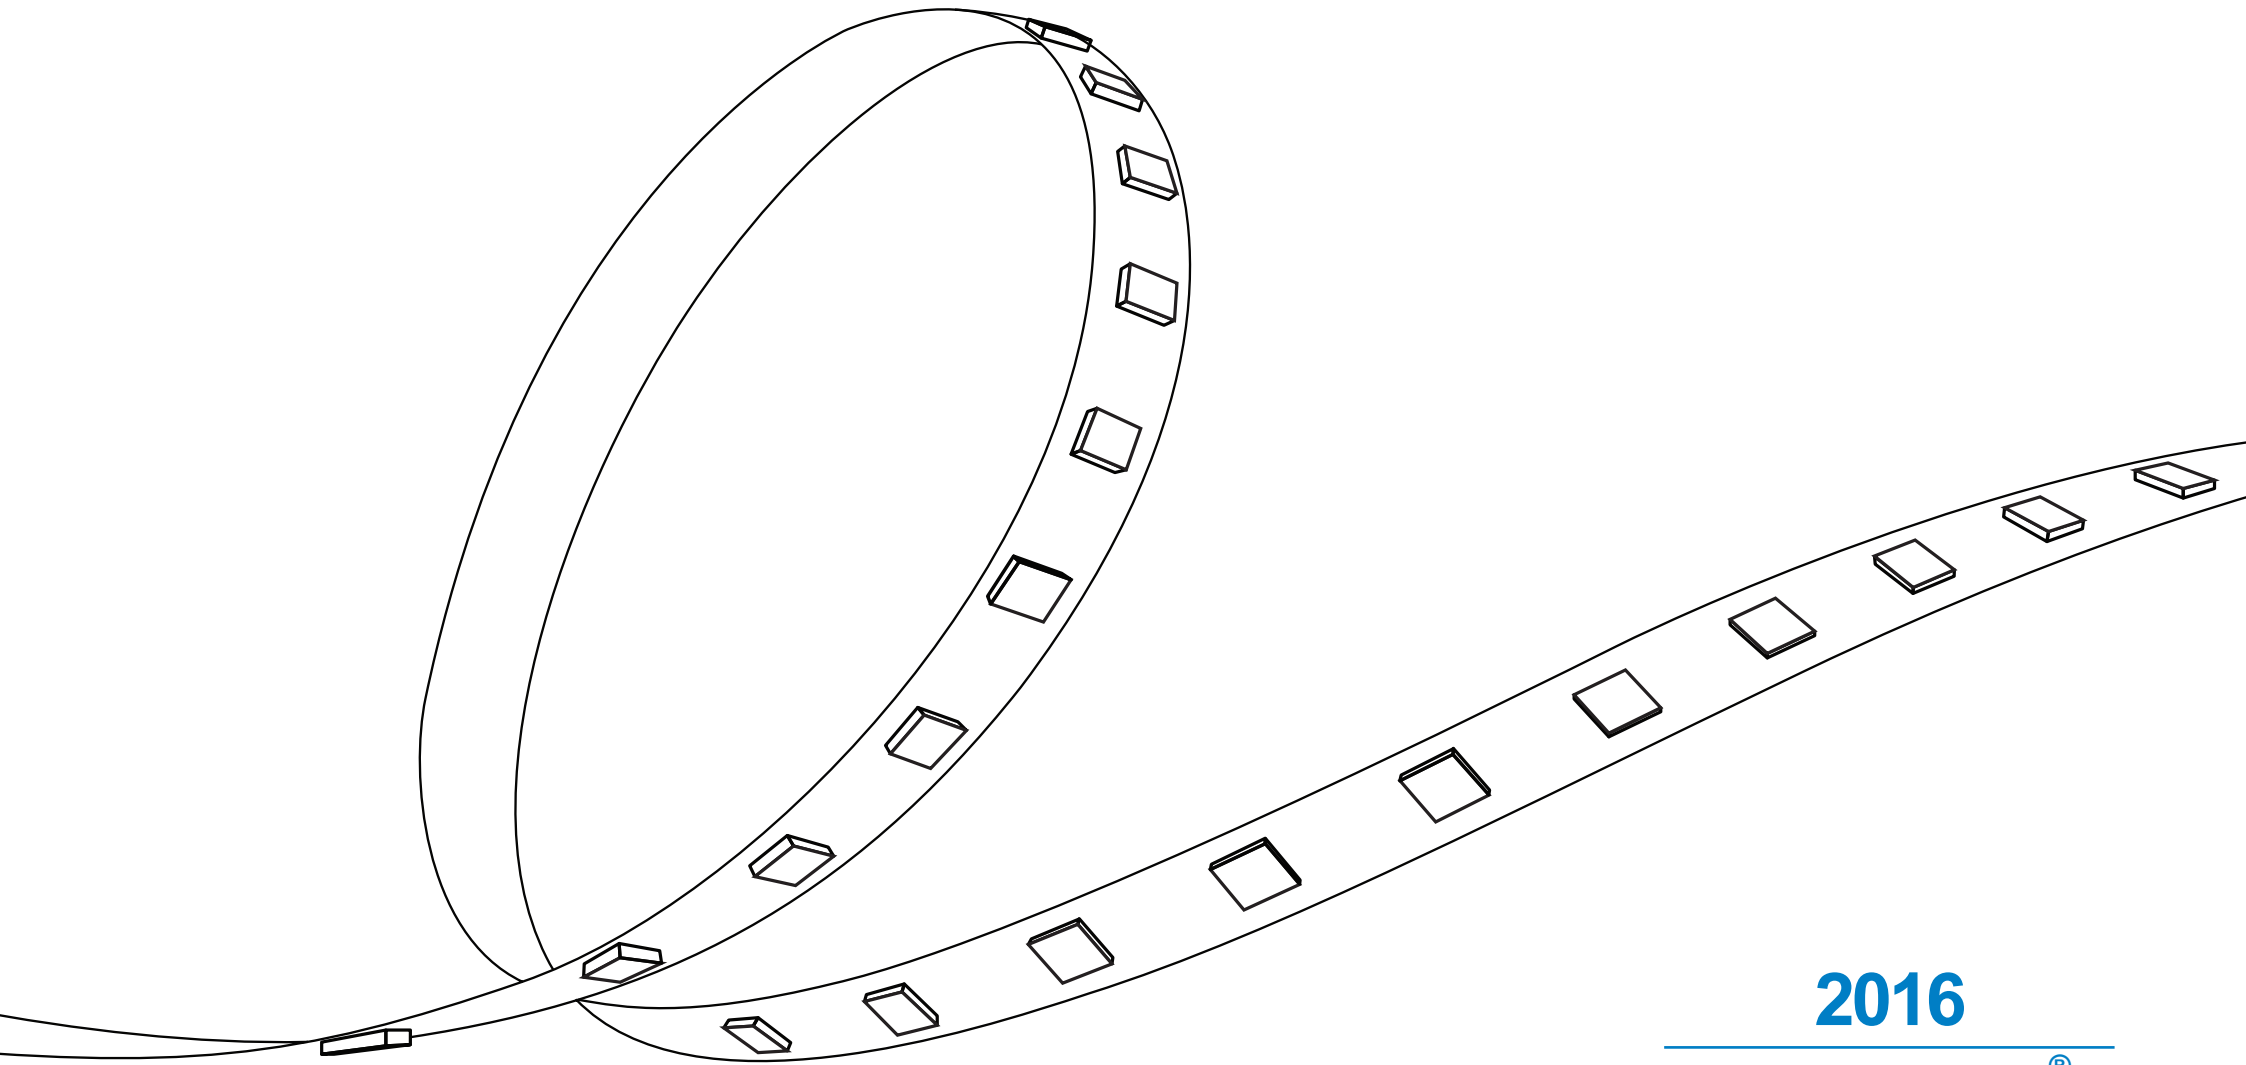


2016

---

TEDSON®

SWEDEN - DENMARK

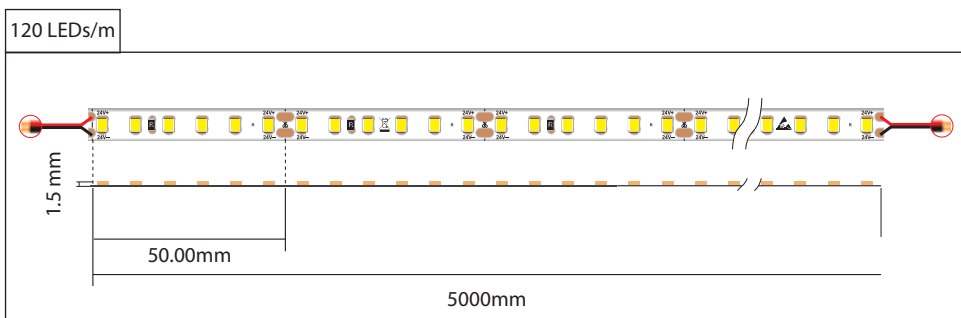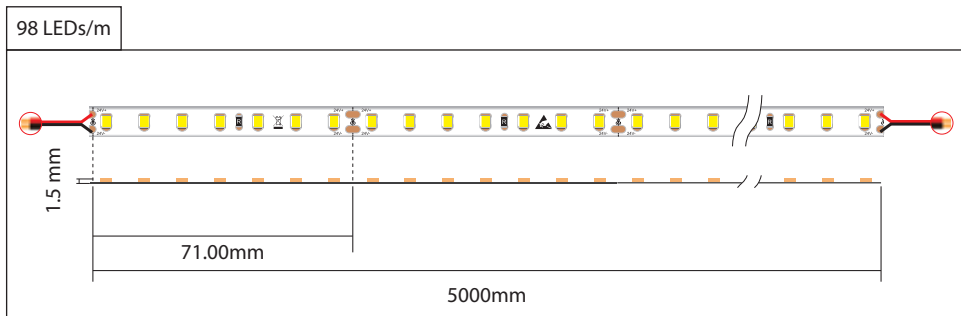


Options 2835


LED type	LEDs	CCT	Lumen/meter	Power	CRI	Current	Voltage	Angle	L70	Temp	IP Grade	Measurement	Cutting	Energygrade
SMD 2835	98/m	2700K	900lm	10W/m	>90	0.4A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x8x1,5mm	71mm(7LEDs)	A+
SMD 2835	98/m	3000K	940lm	10W/m	>90	0.4A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x8x1,5mm	71mm(7LEDs)	A+
SMD 2835	120/m	2700K	1350lm	14,4W/m	>90	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x8x1,5mm	50mm(6LEDs)	A+
SMD 2835	120/m	3000K	1450lm	14,4W/m	>90	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x8x1,5mm	50mm(6LEDs)	A+
SMD 2835	120/m	4000K	1550lm	14,4W/m	>90	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x8x1,5mm	50mm(6LEDs)	A+
SMD 2835	120/m	4000K	1550lm	14,4W/m	>90	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	Nano IP67	5000x8x1,5mm	50mm(6LEDs)	A+



60 LEDs/m

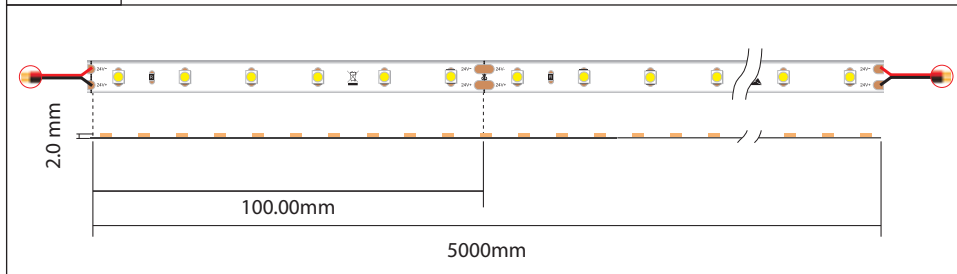

120 LEDs/m

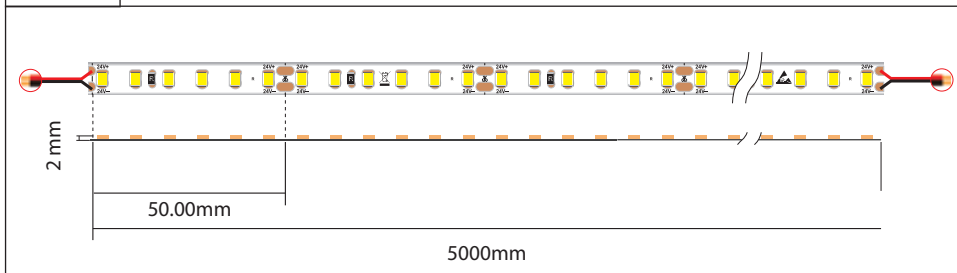

Options 2835

LED type	LEDs	CCT	Lumen/meter	Power	CRI	Current	Voltage	Angle	L70	Temp	IP Grade	Measurement	Cutting	Energygrade
SMD 3528	60/m	2700K	280lm	4.8W/m	>90	0.2A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33/IP67	5000x8x2mm	100mm(6LEDs)	A+
SMD 3528	60/m	3000K	280lm	4.8W/m	>90	0.2A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33/IP67	5000x8x2mm	100mm(6LEDs)	A+
SMD 3528	60/m	4000K	310lm	4.8W/m	>80	0.2A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x8x2mm	100mm(6LEDs)	A+
SMD 3528	30/m	3000K	140lm	2,4W/m	>80	0.2A/m	DC 12V	120°	30000h	-20° ~ +45°C	IP33	5000x8x2mm	100mm(6LEDs)	A+
SMD 3528	120/m	2700K	560lm	9.6W/m	>90	0.4A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x8x2mm	50mm(6LEDs)	A+
SMD 3528	120/m	3000K	560lm	9.6W/m	>80	0.4A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x8x2mm	50mm(6LEDs)	A+
SMD 3528	120/m	4000K	620lm	9,6W/m	>80	0.4A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x8x2mm	50mm(6LEDs)	A+




## Specification LEDstrip SMD 5630 CRI>80

LED Belysning

5630

60 LEDs/m

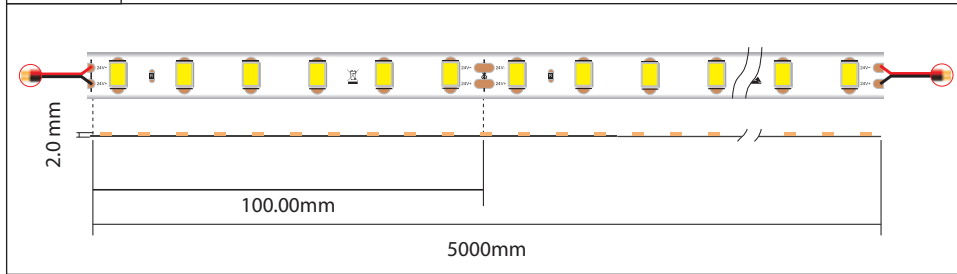

### Options 5630



LED type	LEDs	CCT	Lumen/meter	Power	CRI	Current	Voltage	Angle	L70	Temp	IP Grade	Measurement	Cutting	Energygrade
SMD 5630	60/m	2700K	1350lm	14,4W/m	>80	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x12x2mm	100mm(6LEDs)	A+
SMD 5630	60/m	3000K	1450lm	14,4W/m	>80	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x12x2mm	100mm(6LEDs)	A+
SMD 5630	60/m	4000K	1550lm	14,4W/m	>80	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33	5000x12x2mm	100mm(6LEDs)	A+

## Specification LEDstrip SMD 5050 RGBW

LED Belysning

5050 RGBW

60 LEDs/m

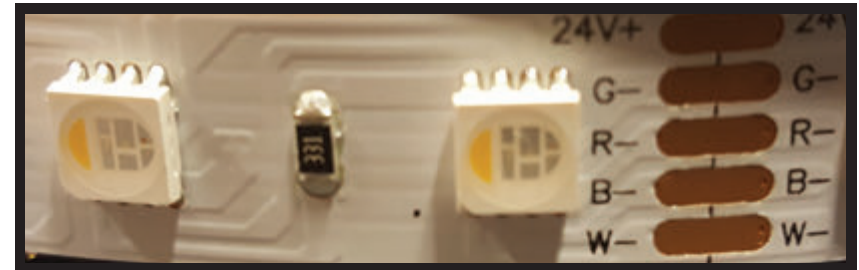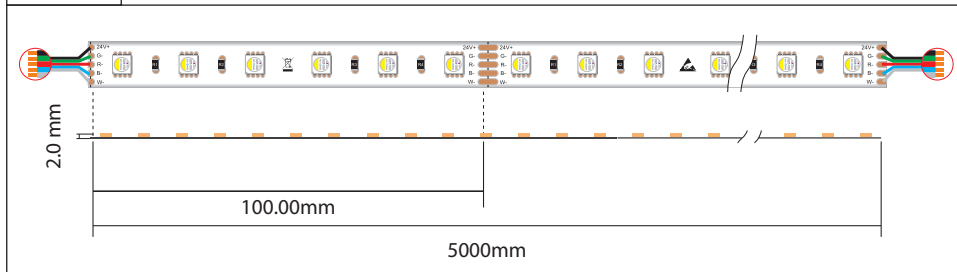

### Options 5050

LED type	LEDs	CCT	Lumen/meter	Power	CRI	Current	Voltage	Angle	L70	Temp	IP Grade	Measurement	Cutting	Energygrade
SMD 5050	60/m	W:3000K R:620-630mm G:520-530mm B:465-475mm	280lm	19.2W/m	>80	0.8A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP33/IP67	5000x12x2mm	100mm(6LEDs)	A+



## Options 5630 Samsung

Art.No	LED type	LED's	CCT	lm/m	Power	CRI	Current	Voltage	Angle	L70	Temp	IP Grade	Measurement	Cutting
56WW2700602433	SMD 5630	60/m	2700K	1350lm	14,4W/m	>80	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x12x2mm	100mm(6LEDs)
56WW602433	SMD 5630	60/m	3000K	1450lm	14,4W/m	>80	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x12x2mm	100mm(6LEDs)
56W602433	SMD 5630	60/m	4000K	1550lm	14,4/m	>80	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x12x2mm	100mm(6LEDs)

## Options 5050 RGBW

Art.No	LED type	LED's	CCT	lm/m	Power	CRI	Current	Voltage	Angle	L70	Temp	IP Grade	Measurement	Cutting
56RGBWW602433	SMD5050	60/m	RGB/3000K		14,4W/m		0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x12x2mm	100mm(6LEDs)

## Options 3528

Art.No	LED type	LED's	CCT	lm/m	Power	CRI	Current	Voltage	Angle	L70	Temp	IP Grade	Measurement	Cutting
35WW6027002433	SMD 3528	60/m	2700K	280lm	4.8W/m	>90	0.2A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x2mm	100mm(6LEDs)
35WW602433	SMD 3528	60/m	3000K	280lm	4.8W/m	>90	0.2A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x2mm	100mm(6LEDs)
35W602433	SMD 3528	60/m	4000K	310lm	4.8W/m	>90	0.2A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x2mm	100mm(6LEDs)
35WW601233	SMD 3528	30/m	3000K	140lm	2,4W/m	>80	0.1A/m	DC 12V	120°	30000h	-20° ~ +45°C	IP20	5000x8x2mm	100mm(3LEDs)
35WW12027002433	SMD 3528	120/m	2700K	560lm	9,6W/m	>90	0.4A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x2mm	50mm(6LEDs)
35WW1202433	SMD 3528	120/m	3000K	560lm	9,6W/m	>90	0.4A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x2mm	50mm(6LEDs)
35W1202433	SMD 3528	120/m	4000K	620lm	9,6W/m	>90	0.4A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x2mm	50mm(6LEDs)


## Options 2835

Art.No	LED type	LED's	CCT	lm/m	Power	CRI	Current	Voltage	Angle	L70	Temp	IP Grade	Measurement	Cutting
28WW9827002433	SMD 2835	98/m	2700K	900lm	10W/m	>90	0.4A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x1,5mm	71mm(7LEDs)
28WW982433	SMD 2835	98/m	3000K	940lm	10W/m	>90	0.4A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x1,5mm	71mm(7LEDs)
28WW12027002433	SMD 2835	120/m	2700K	1350lm	14,4W/m	>90	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x1,5mm	50mm(6LEDs)
28WW1202433	SMD 2835	120/m	3000K	1450lm	14,4W/m	>90	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x1,5mm	50mm(6LEDs)
28W1202433	SMD 2835	120/m	4000K	1550lm	14,4W/m	>90	0.6A/m	DC 24V	120°	30000h	-20° ~ +45°C	IP20	5000x8x1,5mm	50mm(6LEDs)




# Note

A series of 20 horizontal dashed lines, evenly spaced, intended for writing notes. The lines are light gray and extend across the width of the page.

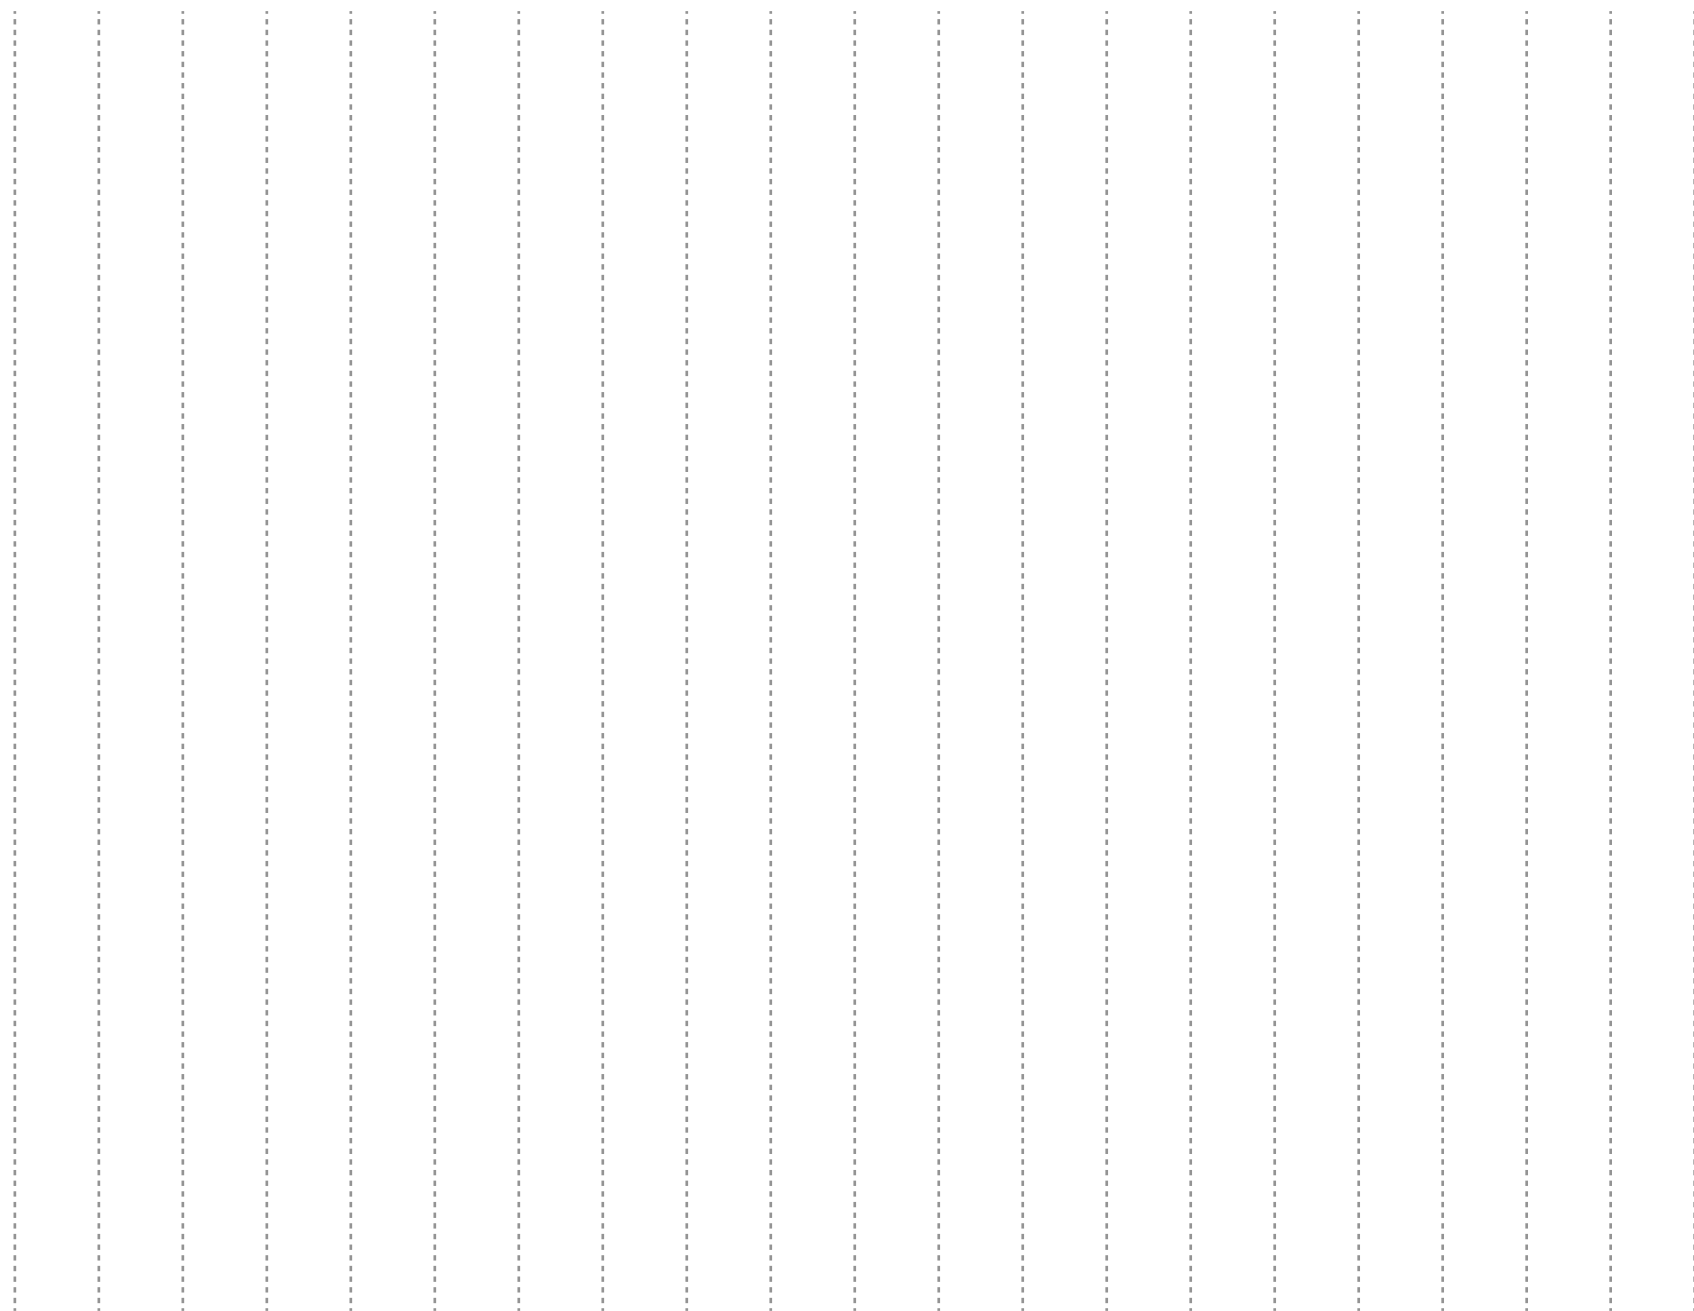

# TEDSON®

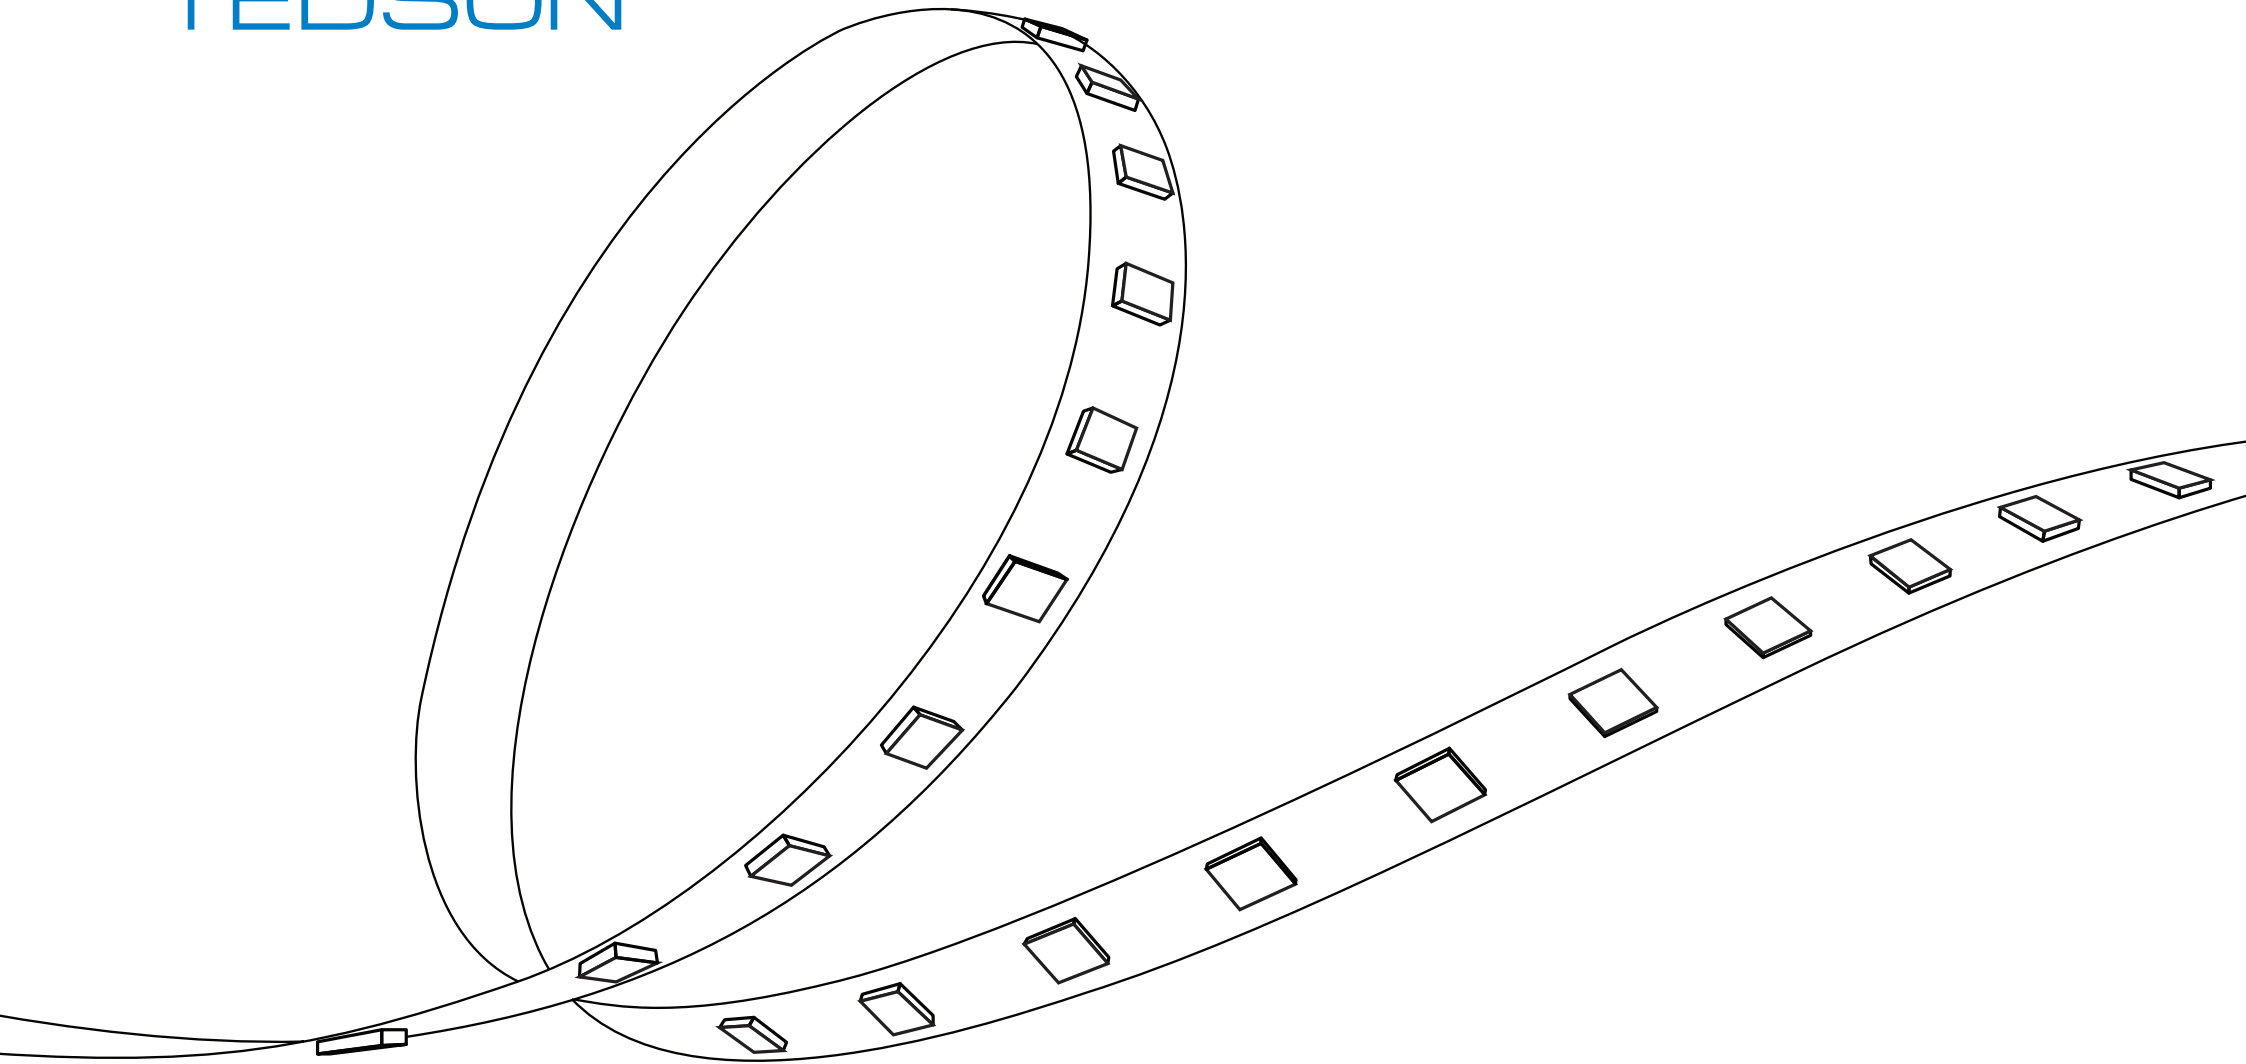

## SWEDEN

**TEDSON AB**  
Källbäckstrydsgatan 3  
507 42 Borås  
Tel: 0704-963434  
Email: [info@tedson.se](mailto:info@tedson.se)

## DENMARK

**TEDSON ApS**  
Hornslydvej 10 B  
7140 Stouby  
Tel: +45 40 112311  
Email: [info@tedson.dk](mailto:info@tedson.dk)