TEDSON

TRACK R

TRACK SYSTEM

DATASHEET

230 V

THREE-CIRCUIT TRACK

2 m

TRACK LENGTH

16 A

MAX. CURRENT

IP20

INDOOR USE

White / black

FINISHES

Recessed mounting.

For Spotia track spotlights and accessories for this track system.

TEDSON AB


www.tedson.se

TRACK R

Recessed 230 V three-circuit track



Product photo shows black finish.

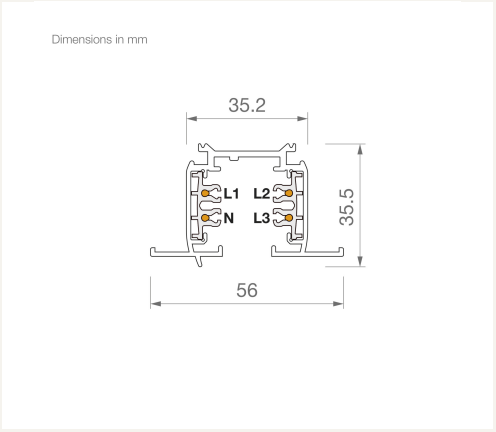

Original dimension drawing, mm.

TECHNICAL SPECIFICATIONS

Supply voltage	220-240 V
System	Three-circuit track, 230 V
Maximum current	16 A
Length	2000 mm
Width × height	56 × 35.5 mm
Material	Copper + aluminium
Protection class / ingress protection	I / IP20
Use / mounting	Indoor / recessed

TRACKS AND FINISHES

LUZ-14101	White, 2 m
LUZ-14102	Black, 2 m

Select the system-specific feeds, connectors and endcaps to suit the installation layout.

TEDSON

TRACK R

TRACK SYSTEM

DATASHEET

230 V

THREE-CIRCUIT TRACK

2 m

TRACK LENGTH

16 A

MAX. CURRENT

IP20

INDOOR USE

White / black

FINISHES

Recessed mounting.

For Spotia track spotlights and accessories for this track system.

TEDSON AB

www.tedson.se

Accessories and article numbers

Separate accessories for Track R. Dimensions in millimetres.

Accessory	White	Black	Dimensions
Endcap	LUZ-22301	LUZ-22302	47.9 × 56 × 35
Straight joint	LUZ-22303	LUZ-22304	68 × 20 × 35
Power feed, right	LUZ-22305	LUZ-22306	98 × 35 × 35
Power feed, left	LUZ-22307	LUZ-22308	98 × 35 × 35
Flexible connector	LUZ-22309	LUZ-22310	248 × 35 × 35
X connector	LUZ-22311	LUZ-22312	166 × 166 × 35
T connector, right	LUZ-22313	LUZ-22314	166 × 101 × 35
T connector, left	LUZ-22315	LUZ-22316	166 × 101 × 35
L connector, left/right	LUZ-22317	LUZ-22318	Not stated

ORIGINAL ACCESSORY VIEWS



Power feed connector | T connector | Straight joint

Product photos show white finish. Black versions are listed in the article matrix.

SYSTEM AND INSTALLATION

L connectors LUZ-22317 (white) and LUZ-22318 (black) can be reconfigured for left or right use. The same article serves both positions.

Choose components for the correct track system and connector orientation. Disconnect the supply before installation and follow the product installation instructions.