TEDSON

DATABLAD / LED-DRIVDON

OWP150D-1W48V


CV | DALI-2, Push DIM | IP67

48 V DC	150 W	3,125 A	IP67
UTSPÄNNING	MAX EFFEKT	MAX STRÖM	KAPSLING

TEKNISKA DATA

Modell	OWP150D-1W48V
Typ	Konstantspänning, 1 kanal
Inspänning	120-277 V AC, 50/60 Hz
Styrning	DALI-2, Push DIM
Dimringsområde	0,1-100 %
Verkningsgrad	minst 91 % vid 230 V, full last
Effektfaktor	minst 0,95 vid 230 V, full last
Viloeffekt	högst 0,5 W vid 230 V
Omgivningstemp.	-20 till +50 °C vid 230 V
Yttermått (L × B × H)	210 × 64 × 33 mm
Vikt	788 g ±5 %

MÅTTSKISS

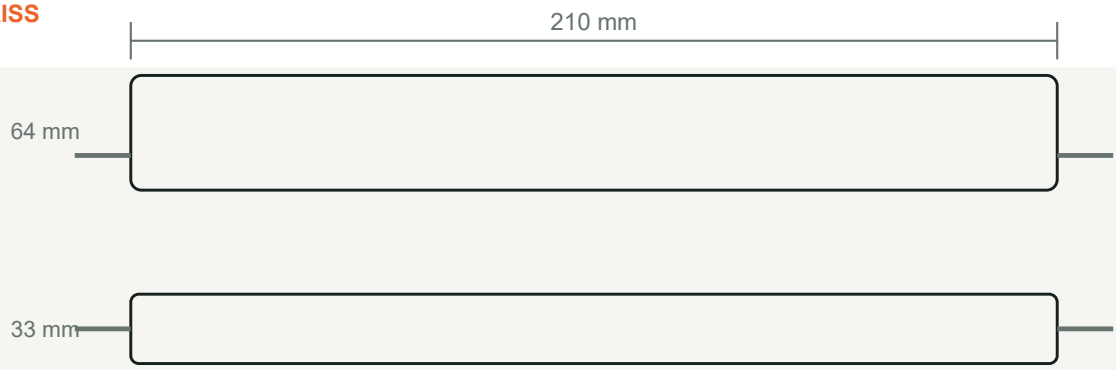

Schematisk illustration, ej skalenlig.

Vid 120 V är omgivningstemperatur högst +40 °C.

TEDSON

DATASHEET / LED DRIVER

OWP150D-1W48V


CV | DALI-2, Push DIM | IP67

48 V DC	150 W	3.125 A	IP67
OUTPUT	RATED POWER	RATED CURRENT	IP RATING

TECHNICAL DATA

Model	OWP150D-1W48V
Type	Constant voltage, 1 channel
Input	120-277 V AC, 50/60 Hz
Control	DALI-2, Push DIM
Dimming range	0.1-100 %
Efficiency	at least 91 % at 230 V. full load
Power factor	at least 0.95 at 230 V. full load
Standby power	max 0.5 W at 230 V
Ambient temp.	-20 to +50 °C at 230 V
Dimensions (L × W × H)	210 × 64 × 33 mm
Weight	788 g ±5 %

DIMENSION SKETCH

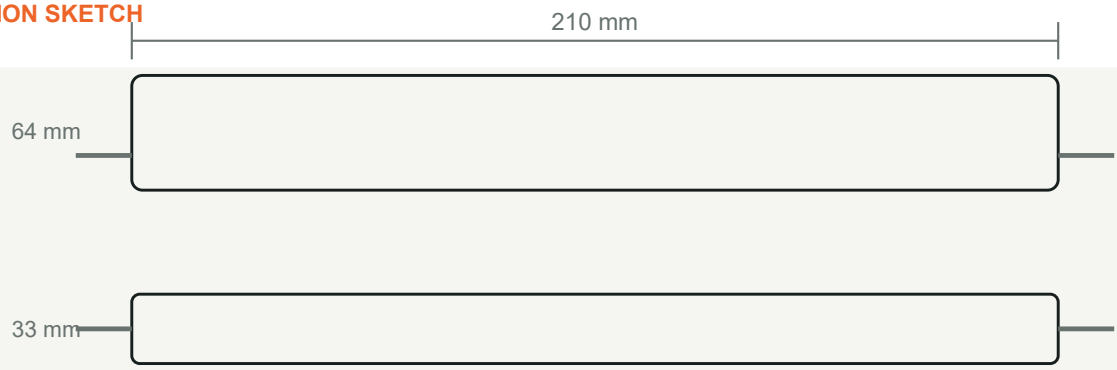

Schematic illustration, not to scale.

At 120 V input, ambient temperature is limited to +40 °C.