# TEDSON

DATABLAD / LED-DRIVDON

# OWP320D-1W24V


CV | DALI-2, Push DIM | IP67

| 24 V DC | 320 W | 13,33 A | IP67 |
|---|---|---|---|
| UTSPÄNNING | MAX EFFEKT | MAX STRÖM | KAPSLING |

## TEKNISKA DATA

| | |
|---|---|
| **Modell** | OWP320D-1W24V |
| **Typ** | Konstantspänning, 1 kanal |
| **Inspänning** | 120-277 V AC, 50/60 Hz |
| **Styrning** | DALI-2, Push DIM |
| **Dimringsområde** | 0,1-100 % |
| **Verkningsgrad** | minst 93 % vid 230 V, full last |
| **Effektfaktor** | >0,95 vid 230 V, full last |
| **Viloeffekt** | <0,5 W |
| **Omgivningstemp.** | -40 till +55 °C |
| **Yttermått (L × B × H)** | 280 × 63 × 33 mm |
| **Vikt** | 1 075 g ±5 % |

## MÅTTSKISS

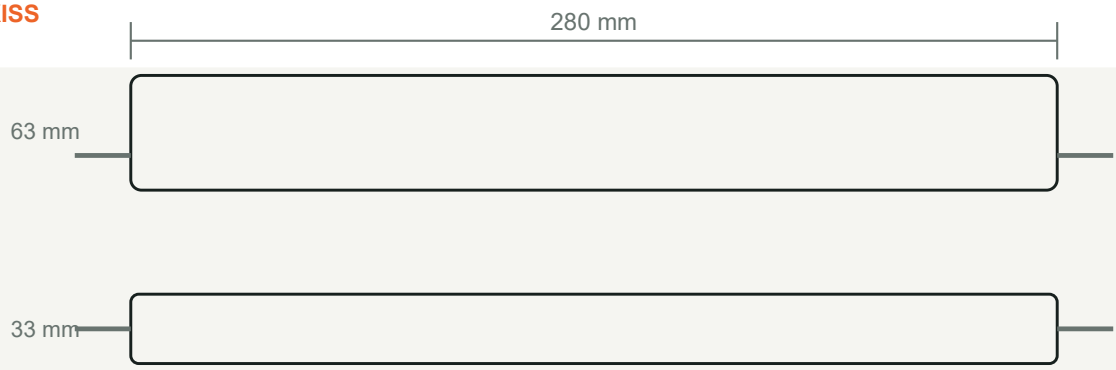


Schematisk illustration, ej skalenlig.

Kontrollera anslutningsmärkning och installationsanvisning före inkoppling.

# TEDSON

DATASHEET / LED DRIVER

# OWP320D-1W24V


CV | DALI-2, Push DIM | IP67

| 24 V DC | 320 W | 13.33 A | IP67 |
|---|---|---|---|
| OUTPUT | RATED POWER | RATED CURRENT | IP RATING |

## TECHNICAL DATA

| | |
|---|---|
| Model | OWP320D-1W24V |
| Type | Constant voltage, 1 channel |
| Input | 120-277 V AC, 50/60 Hz |
| Control | DALI-2, Push DIM |
| Dimming range | 0.1-100 % |
| Efficiency | at least 93 % at 230 V. full load |
| Power factor | >0.95 at 230 V. full load |
| Standby power | <0.5 W |
| Ambient temp. | -40 to +55 °C |
| Dimensions (L × W × H) | 280 × 63 × 33 mm |
| Weight | 1 075 g ±5 % |

## DIMENSION SKETCH

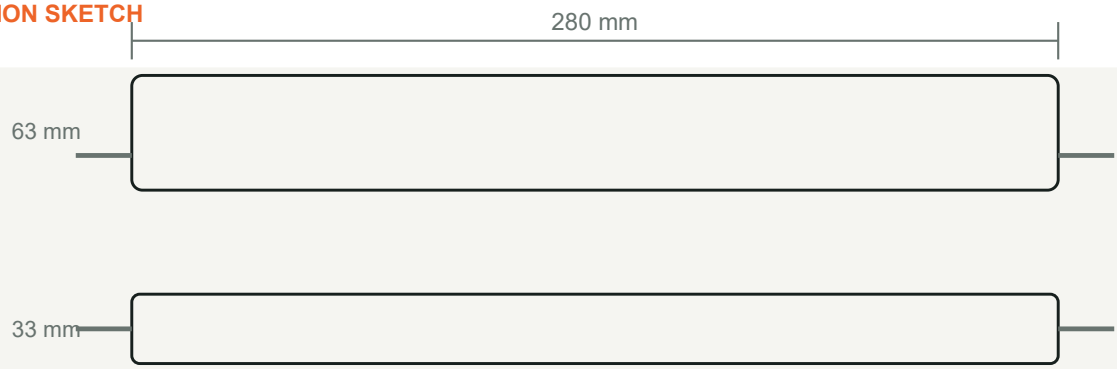


Schematic illustration, not to scale.

Check terminal markings and installation instructions before wiring.